

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 June 2005 (09.06.2005)

PCT

(10) International Publication Number
WO 2005/051079 A1

(51) International Patent Classification?: **A01M 23/10**,
23/30

West Ryde, NSW 2114 (AU). **WEST, Jeffrey** [AU/AU];
107/11 Cole Street, Williamstown, Vic 3016 (AU).

(21) International Application Number:
PCT/GB2004/004423

(74) Agents: **BOWERS, Craig, M.** et al.; Reckitt Benckiser
plc, Intellectual Property Department - Patents Group, Dan-
som Lane, Hull HU8 7DS (GB).

(22) International Filing Date: 20 October 2004 (20.10.2004)

(25) Filing Language: English

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(26) Publication Language: English

(30) Priority Data:
0325446.3 31 October 2003 (31.10.2003) GB

(71) Applicant (for all designated States except MN, US):
RECKITT BENCKISER (Australia) Pty Limited
[AU/AU]; 44 Wharf Road, West Ryde, NSW 2114 (AU).

(71) Applicant (for MN only): **RECKITT BENCKISER (UK)**
LIMITED [GB/GB]; 103-105 Bath Road, Slough, Berk-
shire SL1 3HU (GB).


(72) Inventors; and

(75) Inventors/Applicants (for US only): **RODGERS, Bren-
dyn, Murray** [AU/AU]; 21 The Avenue, Blackburn, Vic
3130 (AU). **WATSON, Duncan, McLeod** [AU/AU];
Reckitt Benckiser (Australia) Pty Limited, 44 Wharf Road,

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: MOUSETRAP



(57) Abstract: The present invention is directed to a mousetrap comprising: an enclosure comprised of a top, a base and apertures located on each of the top and the base, wherein the enclosure is in an open position upon substantial alignment of the apertures; and a trigger mechanism comprising a lever arrangement and a biasing means operably connected to the top and the base, wherein the lever arrangement defines a gap through which a mouse is able to move through and as a result, raise the lever, wherein the enclosure, when in the open position, is able to admit the mouse into the enclosure and when in the closed position, the trapped mouse is substantially concealed within the enclosure, the mousetrap being set to trap the mouse by manual rotation of the top relative to the base to open the enclosure by substantial alignment of the apertures, the enclosure being held open against the force of the biasing means by engagement of the lever arrangement with a stop means, the mousetrap being activated to trap the mouse by the entry of the mouse into the enclosure causing the lever arrangement to disengage from the stop means thereby causing the top to contra-rotate relative to the base under the force of the biasing means so as to close the enclosure, thereby trapping the mouse and substantially concealing the trapped mouse within the enclosure. The present invention further provides a mousetrap comprising an enclosure having an aperture through which a mouse enters and an enclosure floor; the mousetrap further comprising a trap mechanism disposed within the enclosure; the trap mechanism comprising at least a biasing means, a trigger and a trap wire with the trap wire being connected to the biasing means and arranged so as to allow the trap wire to be set, through engagement with the trigger, to a first position against the force of the biasing means in which the mousetrap is set to trap a mouse; the trap mechanism being arranged such that entry of the mouse into the enclosure and depression of the trigger by the mouse causes the trigger to disengage from the trap wire which, through the force of the biasing means, is caused to move from the first position to a second position thereby trapping the mouse between the trap wire and floor, wherein the trigger and opening are arranged so as to substantially conceal and isolate the trapped mouse from the external environment.

WO 2005/051079 A1



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

"Mousetrap"

Field of the Invention

The present invention relates to mousetraps for trapping and/or killing mice, in particular, domestic
5 mice.

Background of the Invention

Mice, although small, can still cause much damage. They destroy articles such as food, books, furniture and
10 even appliances with their gnawing, urine and faeces. Another undesirable trait associated with mice, particularly in domestic environments, is their association with a variety of human diseases, such as for example, asthma. Mice can also spread a variety of
15 organisms that can cause diseases of humans and pets. These include a variety of food poisoning bacteria like *Salmonella*, *Shigella*, *Escherichia coli* (*E. coli*), and others. While the risk of mouse invasion is able to be somewhat controlled or minimised by preventing food waste
20 such as crumbs accumulating in the home, or ensuring that stored food is isolated from the external environment in, for example, sealed containers, it is not always possible to ensure that no food will be left exposed for a period of time. Also, minimising the risk of mice invasion by
25 sealing of cracks, spaces and openings such as vents, pipes and chimney access points can be an expensive, labour intensive and time consuming exercise and is not always possible.

Traditional methods of dealing with mouse invasion in
30 the home involves the use of poisoned baits (rodenticides) that contain anticoagulants, such as warfarin, pival and chlorophacinone. Such baits, while effective, are nevertheless toxic and are therefore undesirable for use in the home, particularly those in which children and pets
35 reside. In addition, poisoned mice often die in inaccessible locations thereby resulting in an unpleasant

odor upon death of the mouse. To circumvent these problems, mousetraps are often employed instead of poisoned baits. Traps are generally preferred as these are less hazardous to use around children and pets.

5 Because mice are caught by the trap, there is less chance of odor from mice dying in wall voids or other inaccessible areas. Mousetraps in the form of wooden-based snap traps are common. While these traps are generally effective, they have the problem of exposing the

10 homeowner, for example, to the highly undesirable task of disposing of the dead mouse once trapped. In addition, once trapped, the exposed dead mouse can pose health problems or cause distress to, for example, children. Furthermore, such traps are also pose a danger to children

15 and pets who may inadvertently activate the trigger and injure themselves. Whilst mousetraps have been developed in which a trap is located within an enclosure in an attempt to isolate the trap from the outside environment and somewhat conceal the dead mouse from view, the

20 enclosure of such mousetraps are not self-sealing after trapping and therefore the home-owner is still exposed to the dead mouse when disposing of the mouse and/or the trap.

While recognising the shortcomings of prior art

25 mousetraps, the present inventors have sought to overcome these deficiencies with a mousetrap that substantially isolates the trap mechanism and a trapped mouse from the external environment. Such traps are desirably simple and cost effective to manufacture and are also able to

30 efficiently trap mice.

Summary of the Invention

The present invention provides a mousetrap comprising an enclosure comprised of at least a top, a base and a

35 closable aperture; and a trigger mechanism comprising a lever arrangement connected to a biasing means, wherein

the aperture, when open, is adapted to admit the mouse into the enclosure and when closed, the trapped mouse is substantially concealed within the enclosure, the mousetrap being set to trap the mouse by manual rotation
5 of the top relative to the base to open the aperture which is held open against the force of the biasing means by engagement of the lever arrangement with a stop means, the mousetrap being activated to trap the mouse by the entry of the mouse into the enclosure causing the lever
10 arrangement to disengage from the stop means thereby causing the top to contra-rotate relative to the base under the force of the biasing means so as to close the aperture, thereby trapping the mouse and substantially concealing the trapped mouse within the enclosure. As
15 such, a mousetrap is provided that is self-closing following the trapping of a mouse. This self-closing feature is particularly desirable as this removes the exposure of the user, for example the homeowner, to the trapped mouse or the need for the user to close the
20 mousetrap once a mouse has been trapped. The mousetrap according to this preferred embodiment is also advantageous as the user is able to readily determine when a mouse has been trapped without the need of actually observing the trapped mouse. A further associated
25 advantage with the mousetraps according to the present invention is increased safety; that is, the enclosure surrounding the trap mechanism prevents, for example, a child or pet from inadvertently setting off the trap and causing possible injury, and also, children and pets are
30 not exposed to trapped or dead mice that can be possible sources of disease.

Preferably, the mousetrap in accordance with a preferred embodiment of the invention further comprises a strike plate connected to the top that extends substantially at right angles to an internal wall of the enclosure such that upon rotation of the top relative to the base under the action of the biasing means, the strike plate rotates with the top and contacts the mouse. In this way, the mouse is contacted by the strike plate thereby incapacitating or killing the mouse. Preferably also, the mousetrap further comprises a catch plate connected to the base and extending substantially at right angles to an internal wall of the enclosure such that upon contra-rotation of the top relative to the base under the action of the biasing means, the strike plate rotates with the top and contacts the mouse to trap the mouse between the strike plate and the catch plate. As such, not only is the mouse struck by the strike plate upon contra-rotation of the top relative to the base, but it is subsequently squashed between the strike plate and the catch plate thereby increasing the effectiveness of the mousetrap to trap, incapacitate or kill the mouse. In a particularly preferred embodiment of the invention, the stop means may also serve as the strike plate, the strike plate being connected to the top and extending substantially at right angles to an internal wall of the enclosure such that upon contra-rotation of the top relative to the base under the action of the biasing means, the strike plate rotates with the top and contacts the mouse.

The mousetrap according to a preferred embodiment of the invention preferably has at least a section of the base and top that is circular. Such sections thereby

allow the top and base to rotate relative to each other. For instance, the outer surface of the top and base may be, for example, square or hexagonal in shape, but each of the top and base still having a circular portion so as to
5 be able to be interfitted in such a way as to allow the top and base to rotate relative to one another. In a particularly preferred embodiment of the invention however, the enclosure is circular in shape.

It is envisaged that the mousetrap in accordance with
10 the present invention may be a single-use device (i.e. disposable) wherein a user disposes of the mousetrap and the trapped mouse without the need to open the mousetrap and remove the mouse. The mousetrap in accordance with a preferred embodiment of the invention may, however, be
15 reusable such that a user is able to remove and reset the mousetrap. In this regard, so as to assist in the removal of the dead mouse, the mousetrap is able to be disassembled. This feature also advantageously assists in the cleaning of the mousetrap after removal of a dead
20 mouse prior to resetting the mousetrap.

In a particularly preferred embodiment, the biasing means is a helical torsion spring. Alternative biasing means such as elastic materials, spring metals in leaf or flat spring form, or compression springs or any other
25 biasing means known to persons skilled in the art.

So as to assist in the incapacitation or killing of mice, the mousetrap according to a preferred embodiment of the invention also includes one or more spikes extending from the strike plate thereby impaling the mouse upon
30 contact. Alternatively, the strike plate and/or catch plate may further include one or more projections that assist in striking and kill of the mouse. In a

particularly preferred embodiment, the projections are in the form of angular kinks in the strike and/or catch plate profiles.

It is envisaged that the mousetrap according to yet
5 another preferred embodiment will further comprise a bait housing. Preferably, the bait housing is located in the centre of the enclosure. In this way, the mouse has to enter the maximum distance into the mousetrap enclosure before activating the trap. This ensures that the mouse
10 is fully enclosed within the enclosure before trap occurs, thereby substantially concealing all parts of the trapped mouse from external view. Preferably also, the bait housing is able to be loaded with bait from the underside of the enclosure base. This makes the mousetrap easy and
15 efficient to load with bait without the need for disassembly of the mousetrap. Once the bait is positioned, through the underside of the mousetrap, in place, the bait may be retained in position with a seal, such as, for example, an adhesive label that is able to be
20 peeled back to insert the bait into the bait housing and subsequently adhered to maintain the bait in position. Preferably also, the bait housing is configured so that the bait is physically isolated from the enclosure wherein the bait housing comprises one or more vents to allow the
25 bait to be sensed by the mouse. The bait housing may still further include one or more spikes that assist in maintaining the bait within the bait housing. Also envisaged is the mousetrap may be provided to the consumer with bait located within the bait housing. In this way,
30 baits such as grains, nuts or seeds presented as whole or broken pieces, or as the base for paste, gel, pellet, or extruded or moulded wax-block formulations with or without

additional pheromone or animal- or plant-derived ingredients, are able to stored long-term within the mousetrap and sold as a single unit to the consumer.

In a particularly preferred embodiment, the mousetrap
5 according to a preferred embodiment of the invention further includes a lip adapted to fit around the top of another mousetrap thereby allowing two or more mousetraps to be stacked. This is particularly advantageous when the mousetraps are displayed for sale in multiple units per
10 pack.

The present invention also provides a mousetrap comprising an enclosure having an aperture through which a mouse enters and an enclosure floor; the mousetrap further comprising a trap mechanism disposed within the enclosure;
15 the trap mechanism comprising at least a biasing means, a trigger and a trap wire with the trap wire being connected to the biasing means and arranged so as to allow the trap wire to be set through engagement with the trigger, to a first position against the force of the biasing means in
20 which the mousetrap is set to trap a mouse; the trap mechanism being arranged such that entry of the mouse into the enclosure and depression of the trigger by the mouse causes the trigger to disengage from the trap wire which, through the force of the biasing means, is caused to move
25 from the first position to a second position thereby trapping the mouse between the trap wire and floor, wherein the trigger and opening are arranged so as to substantially conceal and isolate the trapped mouse from the external environment. Preferably the trap mechanism
30 further comprises a trap base. More preferably, the trap base is a wire support base. In a particularly preferred embodiment of the invention, the trap base is formed from

a substantially rigid material. Suitable materials are injection mouldable materials such as plastic material polyethylene, polypropylene, ABS, and polystyrene. In this way, when a relatively bendable enclosure such as, 5 for example, an enclosure fabricated from cardboard is used, the unit is able to withstand higher stress loads on the enclosure without compromising the operation of the trap mechanism. While cardboard is a particularly preferred material for the enclosure, other suitable 10 materials include sheet polypropylene, polyethylene, polyvinyl and acetate. While a particularly preferred shape for the mousetrap enclosure is a wedge-shaped box, other shapes are conceivable such as rectangular, cylindrical or conical shaped enclosures or folding 15 concertina shapes which are of a size adapted to accommodate a mouse, yet are still small enough so that the mouse is in a relatively confined space within the enclosure. Although it is envisaged that the mousetraps are for single-use (i.e, disposable after a mouse is 20 trapped), the mousetraps may also be reusable. In this regard, so as to assist in the removal of the dead mouse, the mousetrap is able to be disassembled. This feature also advantageously assists in the cleaning of the mousetrap after removal of a dead mouse prior to resetting 25 the mousetrap.

In a particularly preferred embodiment, the trap mechanism further comprises a bait housing. Preferably, the bait housing is situated on the trigger at a position so as to achieve a maximum possible distance between the 30 bait and the enclosure opening is achieved. This ensures that the mouse is completely within the enclosure before trap occurs.

The present invention will now be described in detail with reference to a number of preferred embodiments as illustrated in the accompanying figures.

5 Brief Description of the Figures

Figure 1 depicts a perspective view the mousetrap according to a preferred embodiment of the invention wherein the top and base are in the closed position..

Figure 2 depicts a perspective view of the mousetrap
10 according to Figure 1 wherein the top and base are set in the set state ready for trapping a mouse.

Figure 3 depicts a perspective view of the mousetrap according to Figure 1 wherein a portion of the top has been omitted thereby revealing the internal parts of the
15 mousetrap.

Figure 4a depicts a perspective view of the mousetrap according to Figure 3 showing how the trigger is activated. Figures 4b and 4c depict perspective views of the top (Figure 4b) and the lever arrangement (Figure 4c)
20 in accordance with another preferred embodiment of the invention. In Figure 4b, the top is shown from the underside with the stop means located in the top interior. In Figure 4c, the releasable catch means located on the lever arrangement is shown.

Figures 5a, 5b and 5c depict, respectively, an exploded view of the mousetrap according to Figure 1 showing the working interrelation of the internal parts of the mousetrap, a sectional view of the mousetrap and a perspective view showing the underside of the mousetrap.
25

Figures 6a and 6b depict plan views of two preferred
30 embodiments of the mousetrap according to the invention, that show, in particular, preferred strike and catch plate configurations.

Figures 7a and 7b depict perspective views of a
35 mousetrap according to another preferred embodiment of the

invention in which the mousetrap is shown from the front (Figure 7a) and from the rear (Figure 7b).

Figures 8a and 8b depict, respectively, a perspective view of the mousetrap according to a preferred embodiment of the invention wherein the enclosure is shown as transparent body for the purpose of depicting trap mechanism location within the enclosure wherein the trap wire is in the set position and a perspective view of the mousetrap according to Figure 8a wherein the trap wire is in the trap position.

Figures 9a and 9b depict, respectively, a perspective view of the trap mechanism according to a preferred embodiment of the invention wherein the trap wire is in the set position and a perspective view of the trap mechanism according to a preferred embodiment of the invention wherein the trap wire is in a trap position.

Figure 10 depicts a perspective view of the mousetrap according to another preferred embodiment of the invention in which a means for hanging the device is provided.

20

Detailed Description of the Invention

Referring to Figures 1 and 2, the mousetrap according to a preferred embodiment of the invention includes an enclosure comprising a top (1), a base (3) and a closable aperture (5) within which a mouse is able to enter when the enclosure is in an open position. The mousetrap of Figure 1 depicts the enclosure in a closed position. The enclosure is able to be moved from the closed position to the open position by the substantial alignment of the aperture (5) in the top (1) and the base (3). (see Figure 2) To set the mousetrap enclosure from the closed position to an open position, the user, such as a homeowner, manually rotates the top relative to the base (3) in the counter-clockwise direction until the indentation (7) is aligned with the aperture (5). Figure

2 shows the mousetrap when in the set position in which the aperture (5) and the indentation (7) are aligned.

In order to more fully describe the mousetrap according to Figures 1 and 2, the mousetrap is depicted in Figure 3 with the top (1) omitted so as to show the internal parts of the mousetrap. The internal parts of the mousetrap comprise a trigger mechanism comprised of a lever arrangement (9) and a biasing means (11). Once the mousetrap has been set (i.e., the aperture is in the open position), a mouse will enter the enclosure through the aperture (5). The lever arrangement (9), when the mousetrap is in the set position, is engaged to a stop means (13) by virtue of a lever (9a) having an arm (9b), connected to a pivot means (9c). The pivot means (9c) allows the lever (9a) to be raised. Mice are very inquisitive animals and will thoroughly explore a new object put in their environment. In particular, mice will burrow and nest in confined spaces and they like to move with their body in contact with a wall. Generally, mice prefer small, tunnel-like or narrow-sided angular enclosures that have dark interiors. Dark interiors are generally explored before light interiors. As such, the configuration of the mousetrap according to this preferred embodiment is particularly attractive as the top (1) and base (3), fabricated from opaque materials, effectively form a tunnel-like enclosure with a dark interior.

Figure 4a shows how the mousetrap interior parts interact to allow the mousetrap to be set to trap a mouse and activated once a mouse has been trapped in accordance with a preferred embodiment of the invention. To set the trap, a user manually rotates the top (1) which is connected to a biasing means (11) in the anti-clockwise direction against the force of the biasing means (11) thereby storing potential energy within the biasing means (11). The top (1) is held in position (so that the aperture (5) is open) by engagement of the lever (9a)

located on the lever arrangement (9) with a stop means (13). The mouse being an inquisitive creature, will enter the enclosure through the aperture (5) and travel through the enclosure in the anti-clockwise direction until it reaches the lever (9a). Due to its inquisitive nature and/or to the attractive odor of the bait, it will attempt to crawl through the gap (15) thereby causing the lever (9a) to raise. As the lever (9a) is raised, it disengages the stop means (13) causing the top to contra-rotate under the force of the biasing means so that the enclosure assumes the closed position (as is depicted in Figure 1).

In another preferred embodiment of the invention, the enclosure is maintained in the open position against the force of the biasing means (11) by engagement of the stop means (13) located in the interior of the top (1) (as depicted in Figure 4b) with a releasable catch means (9d) located on the lever arrangement (9) as shown in Figure 4c. As the mouse crawls through the gap (15) and raises the lever (9a), the lever arrangement (9) pivots by the pivot means (9c) and causes the releasable catch means (9d) located on the lever arrangement (9) to disengage the stop means (13). Once the lever arrangement (9) disengages the stop means (13), the top (1) contra-rotates relative to the base (3) under the action of the biasing means (11) so that the enclosure assumes the closed position (as depicted in Figure 1).

The way in which the mousetrap is assembled is depicted in Figures 5a and 5b in which the mousetrap component parts are shown, respectively, in an exploded view in vertical alignment and also in section view. The mousetrap, in accordance with this particular embodiment, is fabricated from an injection mouldable material such as polypropylene and ABS, however materials such as polyethylene and polystyrene would also be suitable. Most of the component parts are adapted to snap into position and are assembled by a layering arrangement wherein the

parts are sequentially arranged in position from the base (3) to the label (17) in the following way: the base (3) comprising a stop means (13) is adapted to retain a lever arrangement (9) that fits about a spindle (19), followed
5 by positioning of the top (1) with the biasing means (11) inserted in a cavity (21) within the top (1). The biasing means is operably connected to the top (1) and the base (3). In particular, Figure 4a depicts how the biasing means fits in relation to the base (3) and in particular,
10 the spindle (19) forming part of the base (3). The label (17) is then positioned over the top (1) so as to conceal the biasing means (11). Figure 5b shows the sectional profiles of the top (1) and the base (3) to more clearly describe one possible method of configuring the top (1)
15 and base (3) in such a way so that when in relation with the biasing means (11), contra-rotation of the top (1) relative to the base (3) under the force of the biasing means (11) is achieved. Also shown in this embodiment are the bait vents (23) which allow the mouse to sense the
20 bait (not shown) when placed within the bait housing (25). Figure 5c shows the underside of the mousetrap, showing in particular, the bait housing (25) and how the bait may be inserted within the bait housing (25). This figure also shows the lip (27) on the base which allows one mousetrap
25 to be stably and efficiently stacked on another mousetrap in accordance with a preferred embodiment of the invention.

Referring to Figures 6a and 6b, a mousetrap is depicted having stop means (in this embodiment the stop
30 means also acts as a strike plate) (13) and a catch plate (14) that are be configured so as to have one or more projections (16). By virtue of these projections, more efficient incapacitation and/or kill of the mouse upon contact is achieved. In a particularly preferred
35 embodiment, the projections are in the form of angular kinks in the strike and/or catch plate profiles. Figure

6a depicts a mousetrap having a curved strike plate (13) profile and a curved catch plate (14) profile. The curved strike plate (13) profile assists in guiding the mouse to the bait housing (25) while the projections (16) on the strike plate (13) and catch plate (14) aim to increase the impact force on the mouse. Figure 6b depicts a mousetrap having a strike plate (13) having multiple projections (16) (in this case in the form of a kink and a spike) and a catch plate (14) wherein the multiple projections (16) allow for different points of contact with the mouse thereby increasing the efficiency of incapacitation and/or kill.

Referring now to Figure 7a, the mousetrap in accordance with another preferred embodiment of the invention is depicted in which a front perspective view of mousetrap depicts the enclosure (30) having an aperture (32) through which a mouse is able to enter. A rear perspective view of the mousetrap is depicted in Figure 7b. This figure also depicts a slot (34) through which a tag (36) protrudes wherein the tag (36) is connected to the trap wire located with the enclosure interior. In this way, the trap wire (shown in Figure 9a) is able to be set by a user externally of the enclosure (30).

Figures 8a and 8b show how the trap mechanism is disposed within the enclosure (30). In Figure 8a, the trap mechanism is in the set position in which the mouse, upon entry through the aperture (32, see Figures 7a, 7b), will travel through a gap (38) in the trap base (40) towards the rear of the enclosure (30). Once the trap wire (42) is caused to move from a first position as is depicted in Figure 8a to a second position as is depicted in Figure 8b, the mouse will be trapped between the trap wire (42) and the enclosure floor (44).

The trap mechanism according to a particularly preferred embodiment of the invention is depicted in the absence of the enclosure in Figures 9a and 9b. In this

embodiment, the trap mechanism comprises a trap base (40), to which is connected a biasing means (46), a trigger (48) and the trap wire (42). The trap wire (42) is able to move from a first position (the trap position) (as is depicted in Figure 9b) to a second position (the set position) (as is depicted in Figure 9a) by pivot movement within a recess (50) formed within the trap base (40). To set the mousetrap, a user lifts and engages the trap wire (42) in the set position, the trap wire being retained in the set position against the force of the biasing means (46) by virtue of the shape of the base recess (50). That is, the trap wire (42), is held in the second (or set position) against the force of the biasing means (46) by an "over centre" spring action whereby the biasing means is extended, thereby storing potential energy, to an over-centre position and held in this over-centre position by engagement with an abutment (not shown) located within the recess (50). Upon depression of the trigger (48) by the mouse, the biasing means (46) is caused to contract past the over-centre position at which point the biasing means continues to contract, by release of the stored potential energy, causing the trap wire to move from the first to the second position thereby trapping the mouse. The trigger (48) is adapted so that it too is raised as the trap wire (42) is raised from the second (trap) to the first (set) position. Preferably, bait (not shown) is positioned on a bait housing (52) however due to their inquisitive nature, mice will still stand and depress the trigger (48) in the absence of bait. This will cause the trigger (48) to disengage from the trap wire (42), which through the force of the biasing means, will cause the trap wire (42) to move from the first (set) position to the second (trap) position, thereby trapping the mouse between the trap wire (42) and the enclosure floor (44). In this particular embodiment, the base is preferably formed from a injection mouldable component that is

substantially rigid so as to withstand any stresses, such as bending or distortion of the enclosure, such that, advantageously, the trap mechanism is still able to function. In this way, the enclosure (30) may be
5 fabricated out of a cheap material such as, for example, cardboard, but is still able to withstand any stress loads imposed on the mousetrap enclosure (30). Preferably, the trap base (40) is fabricated from ABS although materials such as polypropylene, polystyrene, pressed or folded
10 metal, and wire forms are also suitable. It will be appreciated that the configuration of the trigger (48) in relation to the aperture (32) is such that after the mousetrap has been activated (or triggered), the aperture (32) is substantially closed so as to substantially
15 conceal and isolate the trapped mouse from the external environment.

Figure 10 depicts the mousetrap hung from, for example, a wall by a hang portion (54). In this way, the tab is used with pins, nails or screws to anchor the trap
20 to narrow, raised surfaces such as, for example, shelves, roof or floor beams, rafters or ledges along which mice might be habitually travelling. The hang portion (54) may even be used for display or storage purposes.

It will be appreciated by persons skilled in the art
25 that numerous variations and/or modifications may be made to the invention as shown in the specific embodiments without departing from the spirit or scope of the invention as broadly described. The present embodiments are, therefore, to be considered in all respects as
30 illustrative and not restrictive.

CLAIMS:

1. A mousetrap comprising:

an enclosure comprised of a top, a base and apertures
5 located on each of the top and the base, wherein the enclosure is in an open position upon substantial alignment of the apertures; and

a trigger mechanism comprising a lever arrangement and a biasing means operably connected to the top and the
10 base, wherein the lever arrangement defines a gap through which a mouse is able to move through and as a result, raise the lever,

wherein the enclosure, when in the open position, is able to admit the mouse into the enclosure and when in the
15 closed position, the trapped mouse is substantially concealed within the enclosure,

the mousetrap being set to trap the mouse by manual rotation of the top relative to the base to open the enclosure by substantial alignment of the apertures, the
20 enclosure being held open against the force of the biasing means by engagement of the lever arrangement with a stop means,

the mousetrap being activated to trap the mouse by the entry of the mouse into the enclosure causing the
25 lever arrangement to disengage from the stop means thereby causing the top to contra-rotate relative to the base under the force of the biasing means so as to close the enclosure, thereby trapping the mouse and substantially concealing the trapped mouse within the enclosure.

30

2. The mousetrap according to claim 1 further comprising a strike plate connected to the top and extending

substantially at right angles to an internal wall of the enclosure such that upon rotation of the top relative to the base under the action of the biasing means, the strike plate rotates with the top and contacts the mouse.

5

3. The mousetrap according to claim 1 or claim 2 further comprising a catch plate connected to the base and extending substantially at right angles to an internal wall of the enclosure such that upon contra-rotation of
10 the top relative to the base under the action of the biasing means, the strike plate rotates with the top and contacts the mouse to trap the mouse between the strike plate and the catch plate.

15 4. The mousetrap according to claim 1 wherein the stop means also serves as a strike plate, the strike plate being connected to the top and extending substantially at right angles to an internal wall of the enclosure such that upon contra-rotation of the top relative to the base
20 under the action of the biasing means, the strike plate rotates with the top and contacts the mouse.

5. The mousetrap according to claim 4 further comprising a catch plate connected to the base and extending
25 substantially at right angles to an internal wall of the enclosure such that upon contra-rotation of the top relative to the base under the action of the biasing means, the strike plate rotates with the top and contacts the mouse to trap the mouse between the strike plate and
30 the catch plate.

6. The mousetrap according to claim 5 wherein the strike plate and/or catch plate may further include one or more projections.
- 5 7. The mousetrap according to claim 6 wherein the projections are in the form of angular kinks in the strike and/or catch plate profiles.
8. The mousetrap according to claim 6 in which the
10 projections are in the form of spikes thereby impaling the mouse upon contact.
9. The mousetrap according to any one of the preceding claims in which at least a section of the base and top is
15 circular.
10. The mousetrap according to any one of the preceding claims in which the enclosure is circular in shape.
- 20 11. The mousetrap according to any one of the preceding claims in which the mousetrap is reusable and therefore able to be disassembled so as to allow the removal of a trapped mouse prior to resetting the mousetrap.
- 25 12. The mousetrap according to any of the preceding claims in which the biasing means is a helical torsion spring.
13. The mousetrap according to any one of the preceding
30 claims further comprising a bait housing.

14. The mousetrap according to claim 13 wherein the bait housing is located in the centre of the enclosure.

15. The mousetrap according to claim 13 or claim 14
5 wherein the bait housing is able to be loaded with bait from the underside of the enclosure base.

16. The mousetrap according to any one of claims 13 to 15
10 in which the bait housing is configured so that the bait is physically isolated from the enclosure wherein the bait housing comprises one or more vents to allow the bait to be sensed by the mouse.

17. The mousetrap according to any one of claims 13 to 16
15 wherein the bait housing further includes one or more spikes that assist in maintaining the bait within the bait housing.

18. The mousetrap according to any one of the preceding
20 claims wherein the mousetrap is provided to a consumer with bait located within the bait housing.

19. The mousetrap according to any one of the preceding
claims wherein the base further includes a lip adapted to
25 fit around the top of another mousetrap thereby allowing two or more mousetraps to be stacked.

20. A mousetrap comprising an enclosure having an aperture
through which a mouse enters and an enclosure floor;
30 the mousetrap further comprising a trap mechanism disposed within the enclosure;

the trap mechanism comprising at least a biasing means, a trigger and a trap wire with the trap wire being connected to the biasing means and arranged so as to allow the trap wire to be set, through engagement with the trigger, to a first position against the force of the biasing means in which the mousetrap is set to trap a mouse;

the trap mechanism being arranged such that entry of the mouse into the enclosure and depression of the trigger by the mouse causes the trigger to disengage from the trap wire which, through the force of the biasing means, is caused to move from the first position to a second position thereby trapping the mouse between the trap wire and the floor,

wherein the trigger and aperture are arranged so as to substantially conceal and isolate the trapped mouse from an external environment.

21. The mousetrap according to claim 20 wherein the trap mechanism further comprises a trap base.

22. The mousetrap according to claim 21 wherein the trap base is a wire support base.

23. The mousetrap according to claim 21 wherein the trap base is formed from a substantially rigid material.

24. The mousetrap according to claim 23 wherein the material is an injection mouldable material.

25. The mousetrap according to any one of claims 20 to 24 wherein the trap mechanism operates independently of the enclosure geometry.

5 26. The mousetrap according to any one of claims 20 to 25 wherein the trigger is integral with the enclosure.

27. The mousetrap according to any one of claims 20 to 26 wherein the enclosure is a cardboard box.

10

28. The mousetrap according to any one of claims 20 to 26 wherein the enclosure is wedge-shaped cardboard .

29. The mousetrap according to any one of claims 20 to 28
15 wherein the trap mechanism further comprises a bait housing.

30. The mousetrap according to claim 29 wherein the bait housing is proximate the trigger and positioned at a
20 maximal distance from the aperture.

31. The mousetrap according to any one claims 20 to 30 in which the mousetrap is adapted for reuse, the trap mechanism being moveable from the second position to the
25 first position so as to reset the mousetrap and permit removal of a trapped mouse.

32. The mousetrap according to any of claims 20 to 31 in which the biasing means is a helical torsion spring.

30

33. The mousetrap according to any one of claims 20 to 32 further comprising a means to hang the mousetrap.

1/9

Fig.1.

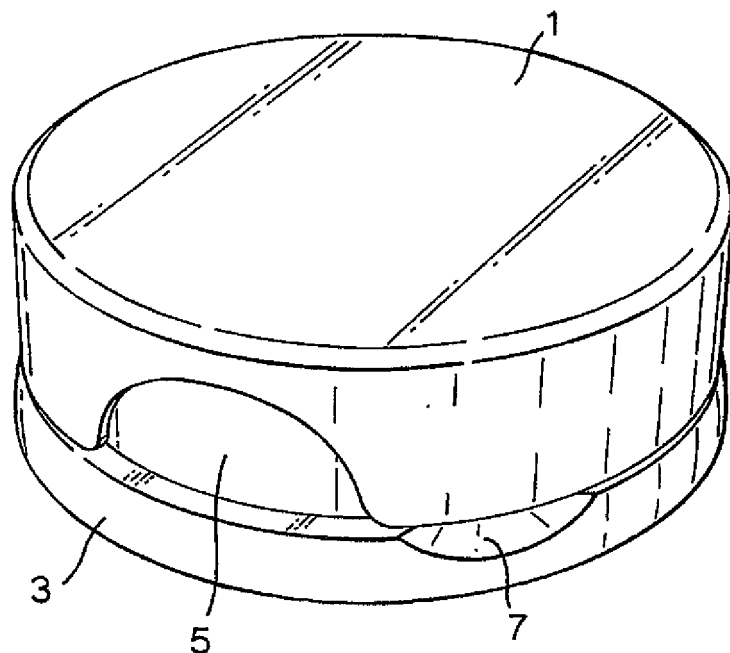


Fig.2.


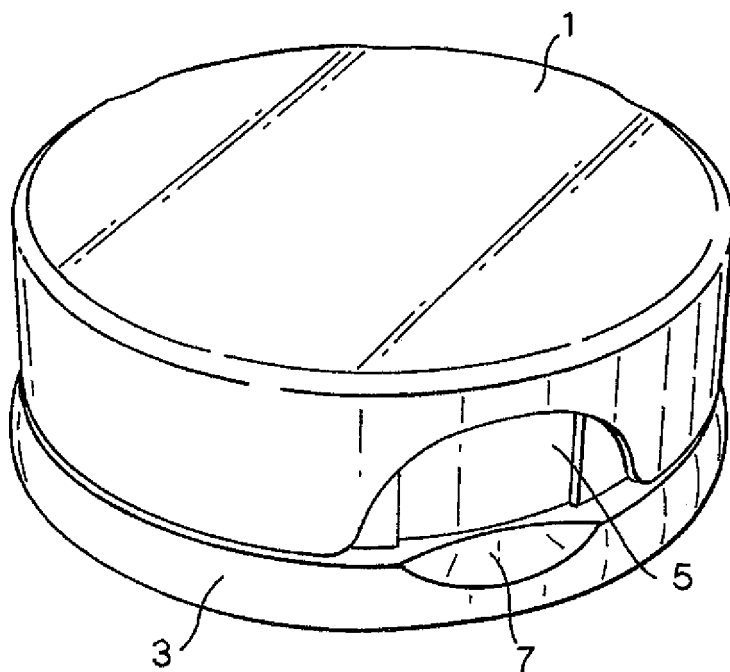


Fig.3.

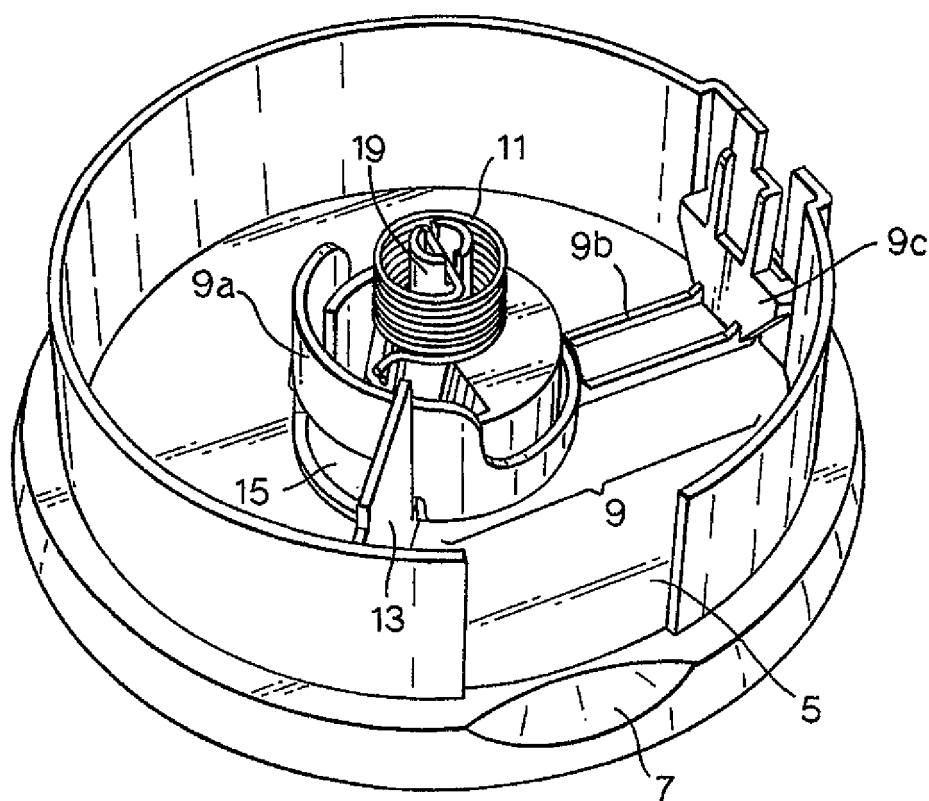

3/9

Fig.4 a.

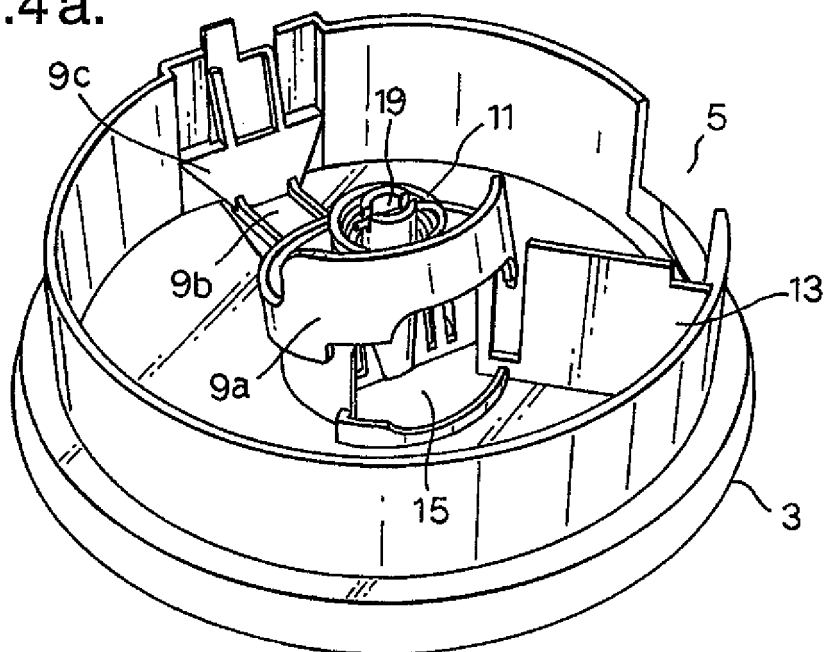


Fig.4b.



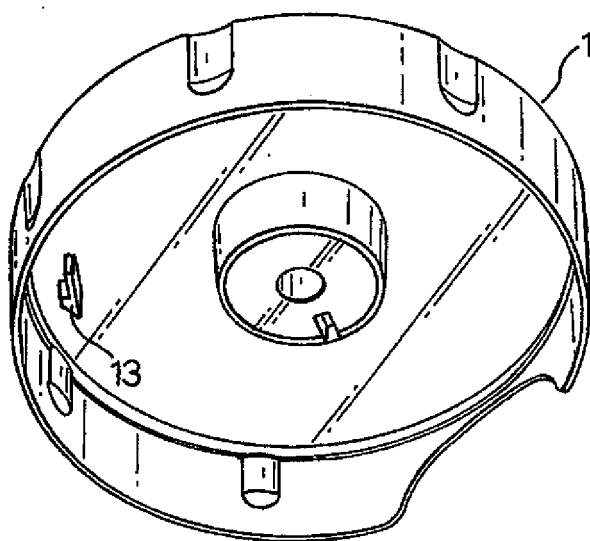


Fig.4c.

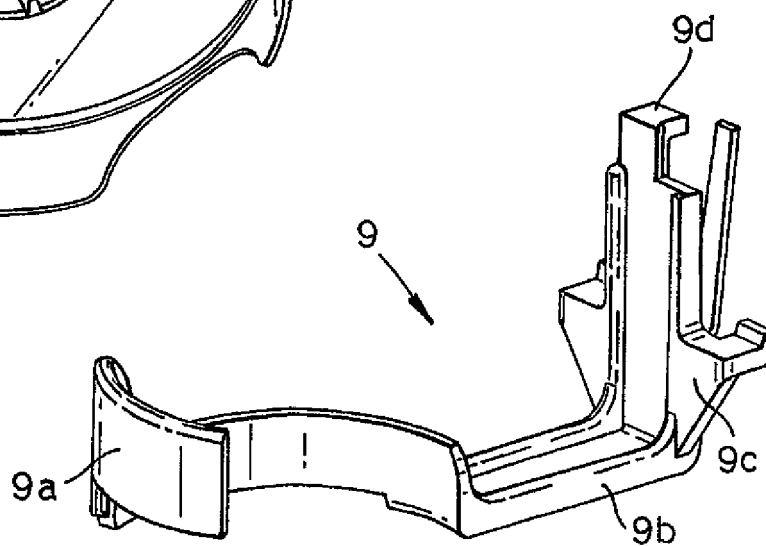

4/9

Fig.5a.

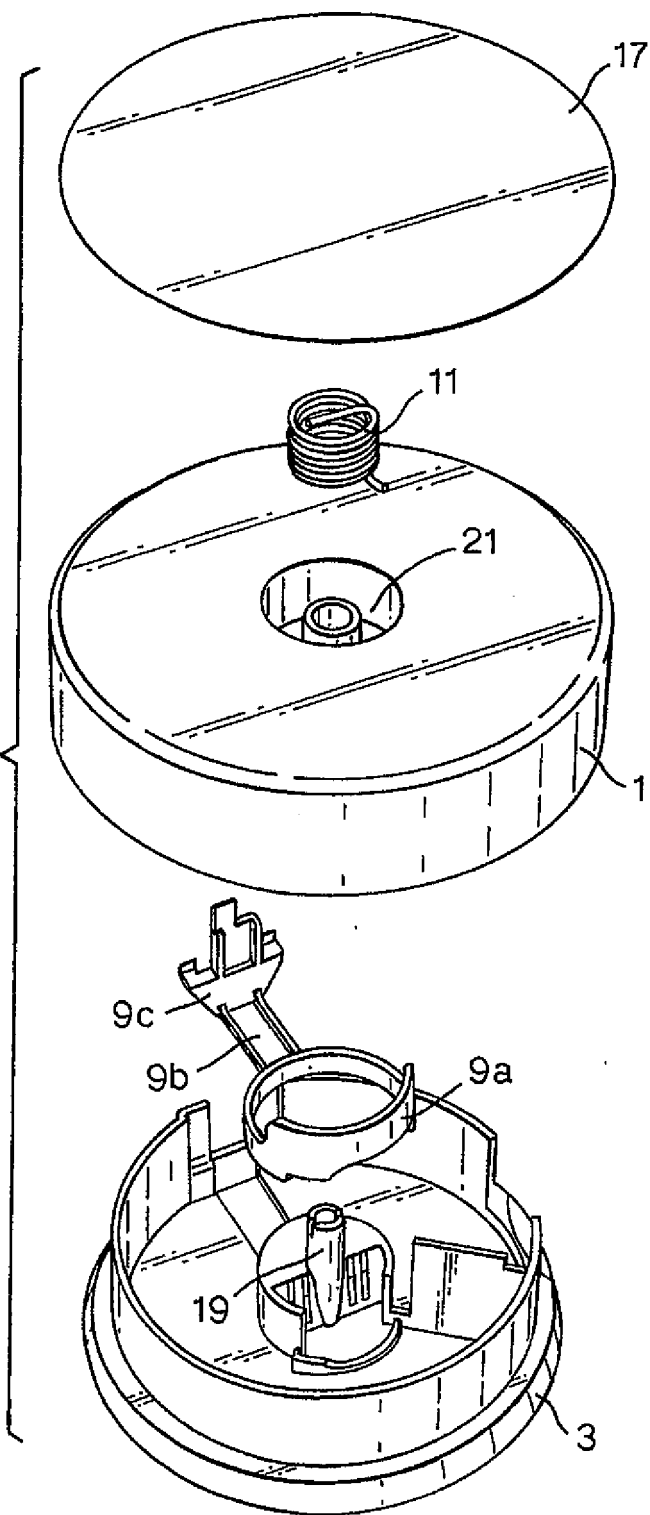

5/9

Fig.5b.


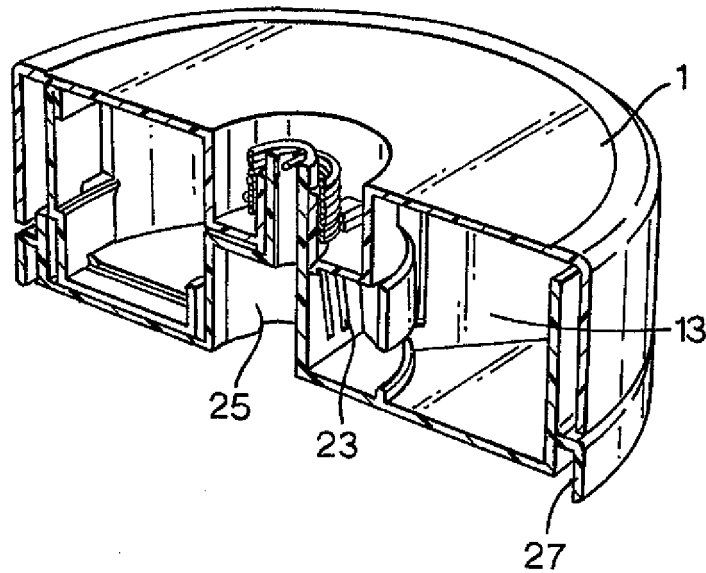


Fig.5c.

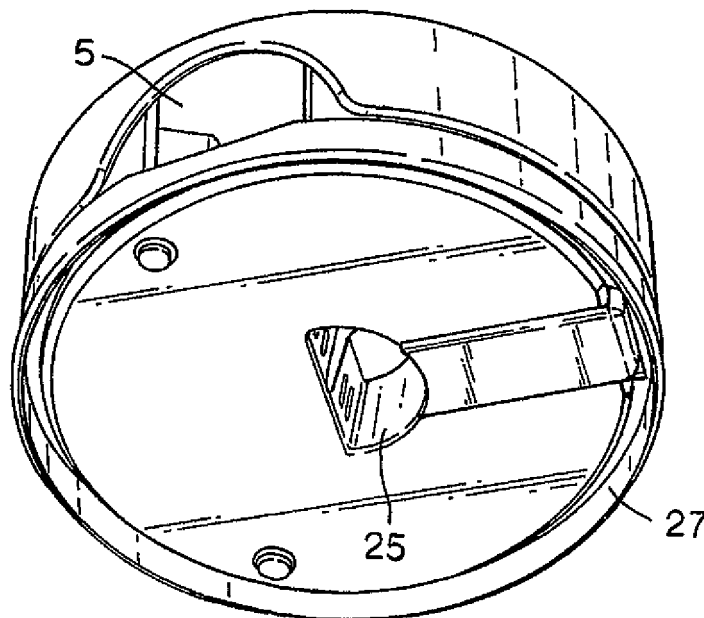

6/9

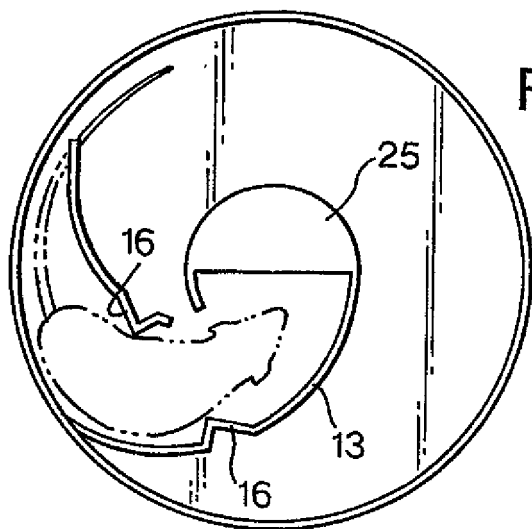


Fig. 6a.

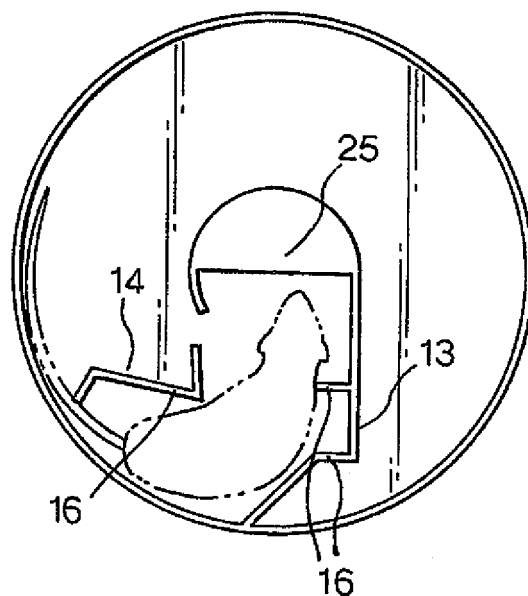


Fig. 6 b.

Fig. 7a.


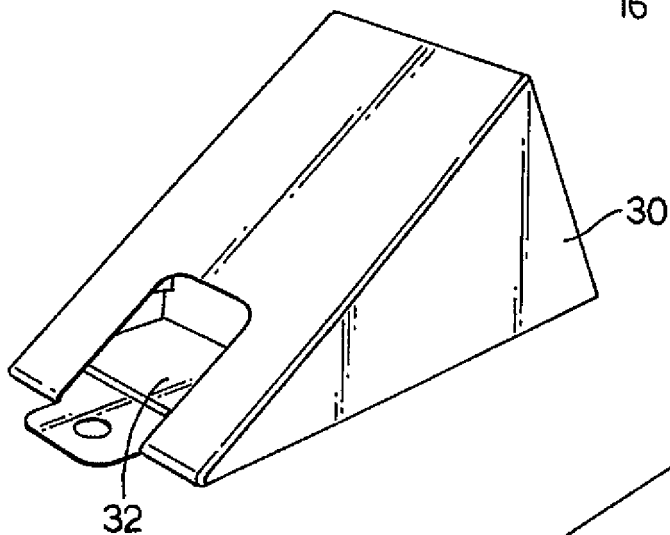


Fig. 7b.

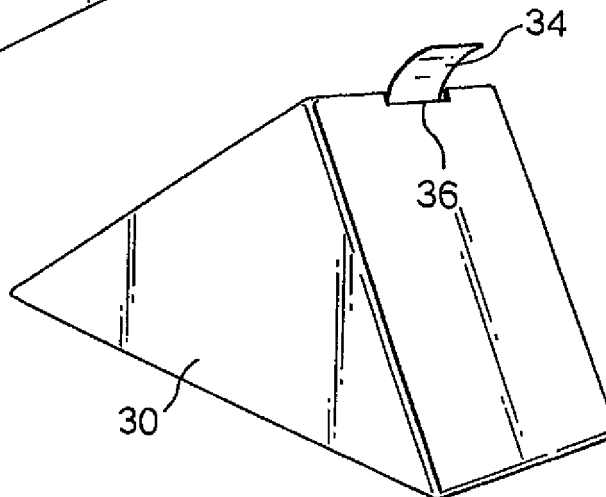

7/9

Fig.8a.

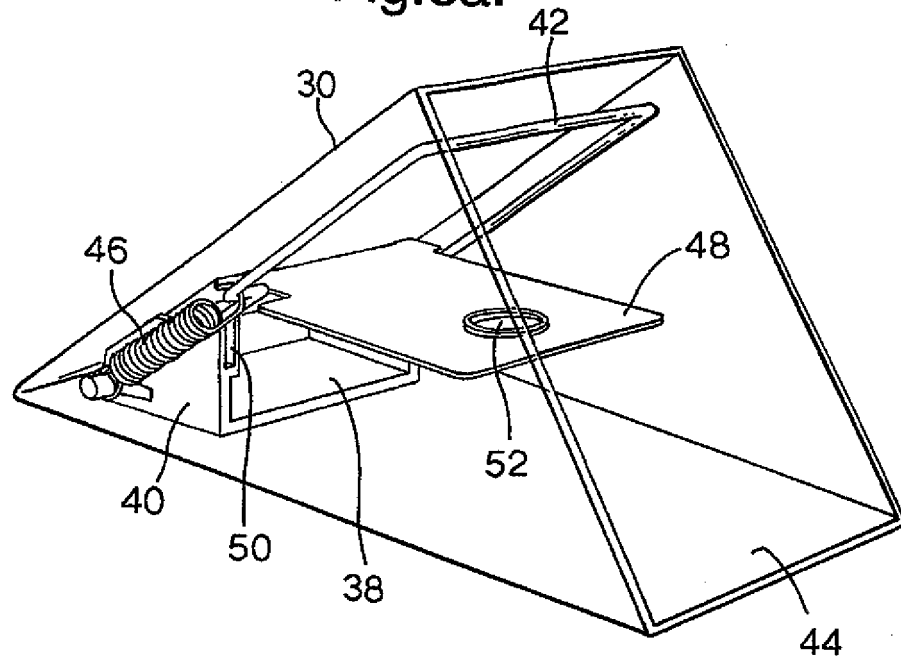


Fig.8b.

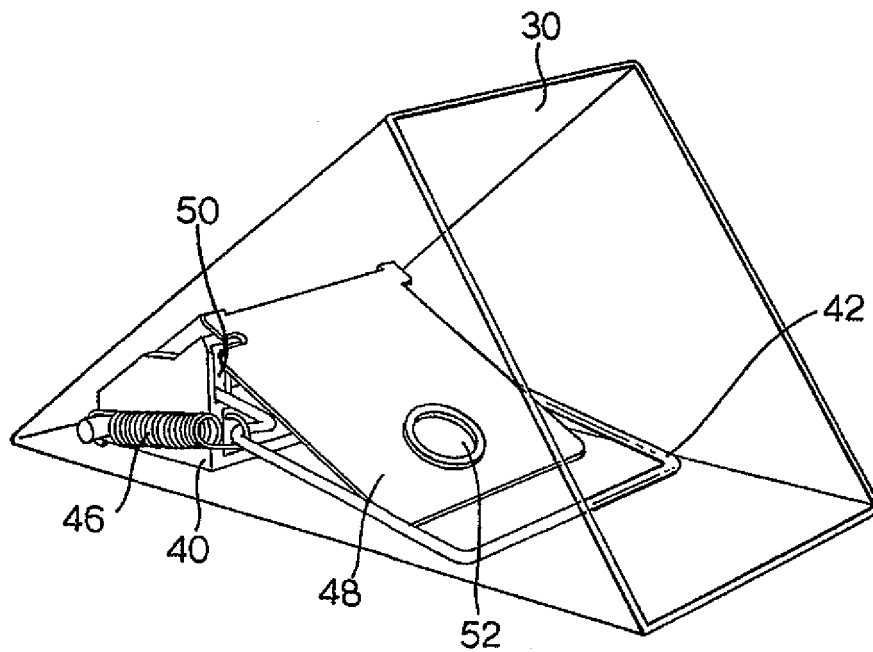


Fig.9a.

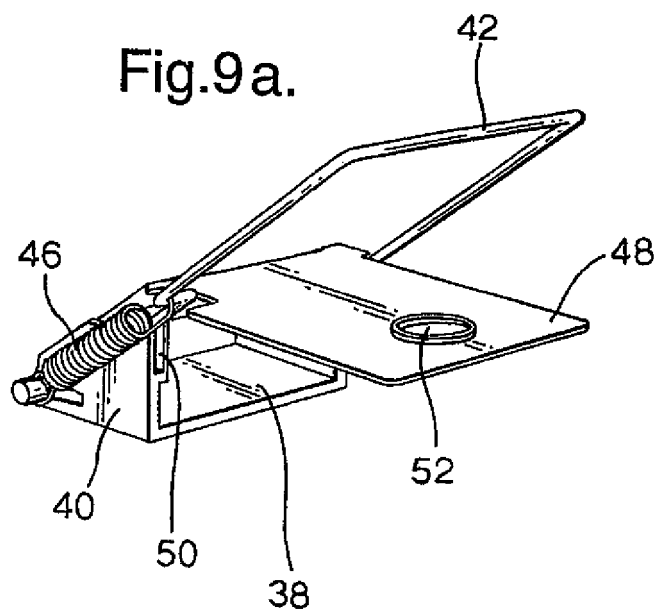


Fig.9b.


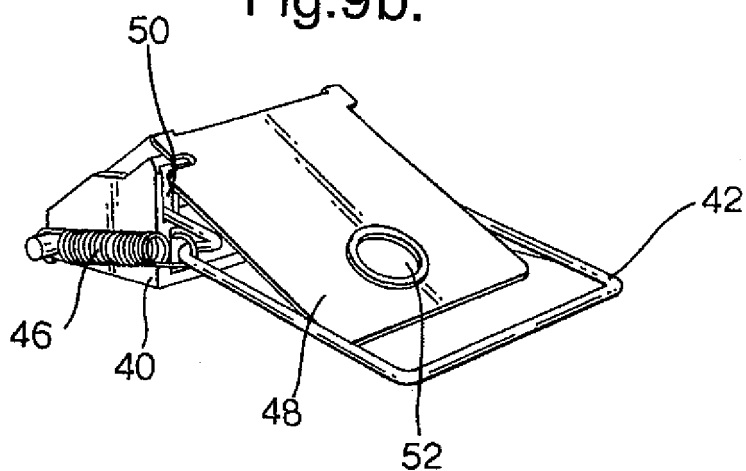


Fig.10.

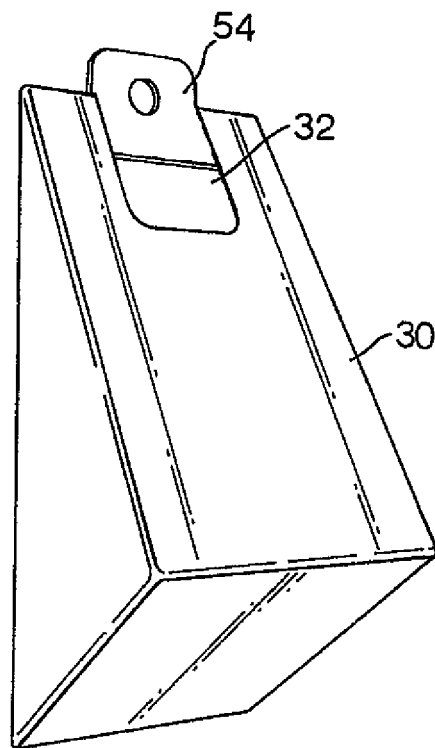

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB2004/004423

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A01M23/10 A01M23/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 207 057 A (GEORGE HENRY HOCKEY) 22 November 1923 (1923-11-22) the whole document	1,9-12
A	GB 298 544 A (EDWARD PITCAIRN WRIGHT) 8 October 1928 (1928-10-08) the whole document	1
A	US 4 155 193 A (MACDONALD, WALLACE J) 22 May 1979 (1979-05-22) column 6, line 16 - column 7, line 27	1
X	US 3 992 803 A (KAISER ET AL) 23 November 1976 (1976-11-23) the whole document	20-32
	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the International filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

7 April 2005

Date of mailing of the international search report

18/04/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Simson, G

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB2004/004423

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 762 093 A (ROHDE W,US) 2 October 1973 (1973-10-02) the whole document	20-26, 31,32
X	US 5 172 512 A (BODKER ET AL) 22 December 1992 (1992-12-22) the whole document	20-23, 25,26, 31,32

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB2004/004423

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 207057	A	22-11-1923	NONE	
GB 298544	A	08-10-1928	NONE	
US 4155193	A	22-05-1979	CA 1041301 A1 GB 1577400 A	31-10-1978 22-10-1980
US 3992803	A	23-11-1976	NONE	
US 3762093	A	02-10-1973	NONE	
US 5172512	A	22-12-1992	AU 666671 B2 AU 2468692 A AU 673829 B2 AU 4062395 A CA 2092536 A1 DE 69224177 D1 DE 69224177 T2 EP 0553336 A1 MX 9204772 A1 WO 9303612 A1	22-02-1996 16-03-1993 28-11-1996 29-02-1996 20-02-1993 26-02-1998 07-05-1998 04-08-1993 01-03-1993 04-03-1993